

THE SCIENCE OF WARMTH

RADIANT HEAT

We put radiant warmth into every fire. You can feel it.

Since 1890, we've been pioneering and perfecting radiant heat technology that generates constant, comfortable warmth within your home.

AUTOFIRETM

Pioneered by Valor, AutoFire automatically adjusts the fire for optimum efficiency and enjoyment.

EFFICIENCY

Radiant heat gas fireplaces are up to 30% more efficient than central forced air systems.

SAFFTY

Our fires are put through rigorous safety testing in our in-house CSA approved lab.

TRADITIONAL LOGS
EDGEMONT CRAFTSMAN
IN PEWTER

Proudly made in North America.

G4 TRADITIONAL LOGS

V-CLASS BURNER

Our precision stainless steel V-Class burner creates a new level of radiant fire and aesthetics.

ADJUSTABLE HEAT

Adjustable flame for constant, even warmth without having to cycle the fire on and off.

REALISTIC LOGS

High definition, low mass fiber ceramic logs heat up and glow quickly, radiating warmth.

CERAMIC GLASS

Durable and robust ceramic glass improves radiant performance.

ALUMINIZED STEEL

Aerodynamic aluminized steel firebox handles high temperatures and delivers efficient radiant warmth.

Please Note: Printed images may vary from actual product. All product information is accurate at time of printing and is subject to change. For more information, visit **valorfireplaces.com**



1 LOGS + GLASS

We design our expertly crafted logs as realistic-looking as possible, and engineer them to harness radiant heat from the flames and glowing embers. For a better look, go to valorfireplaces.com/g4 or visit your local Valor dealer.

TRADITIONAL LOGS NEW



DRIFTWOOD NEW






This minimalist driftwood has a relaxing, easygoing flame that suits the picked-right-off-the-beach look.

The clear tumbled glass of the modern Murano fire beds is illuminated by the fire, casting reflections on the glass base.

PEBBLE BEACH DRIFTWOOD



MURANO GLASS

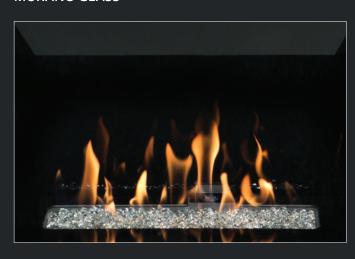



2 LINERS

Choose a firebox liner to complement the logs and front styles you select as well as the surround of your current fireplace.

Please note the tint of the ceramic glass window can warm the liner colors, especially when the fire is on.




LEDGESTONE NEW









RED BRICK FLUTED BLACK REFLECTIVE GLASS



3 FRONTS

Select a front that suits your home and style. Your dealer can help you choose, if necessary, an appropriate backing plate to complement your front and suit your installation.

To see more combinations, visit valorfireplaces.com/g3.5

EDGEMONT

Edgemont fronts are the slimmest—about 2" wide on all sides— and slightly offset from the backing plate that sits flat against the wall.



CRAFTSMAN PEWTER
NEW



BRUSHED NICKEL



CRAFTSMAN BRONZE
NEW



BRONZE



CRAFTSMAN BRUSHED BRASS NEW



FLOATING

Floating fronts sit proud by 1½" of the wall or the optional backing plate.



VINTAGE IRON 2.5"



3 OR 4-SIDED BRONZE 5" also in Vintage Iron

SQUARE

Square front's molding is 5¾ wide by 1¾ deep—giving an architectural feel.




BLACK: also in Vintage Iron 5.75"




4 FINISHES

All our rich, durable finishes are powder-coated, other than Brushed Brass and Nickel which are hand-finished for a strong, artisan appearance. If available, ask your dealer to see an example in person as colors may appear different in various lights.

BLACK: Square front + all backing plates



VINTAGE IRON: Floating + Square fronts





BRUSHED NICKEL: Edgemont front




BRONZE: Floating 5" front



PEWTER: Edgemont Craftsman



BRONZE: Edgemont Craftsman



BRUSHED BRASS: Edgemont Craftsman





SPECIFICATIONS

Always refer to the manual for complete installation instructions.


DIMENSIONS

window: 28" w x 18" h



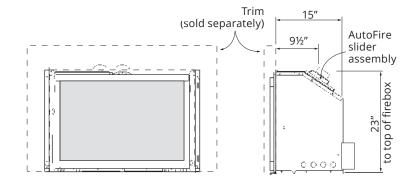


MANTEL CLEARANCES



MANTEL PROJECTION A	1"	4"	8"	14"
MANTEL HEIGHT B*	34"	36"	38"	40"

^{*} Measured from underside of mantel to finished hearth or surface that unit sits on.

VENTING

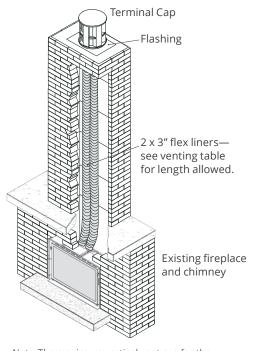

Note: The maximum vertical vent run for the Legend G4 is 40'. The minimum is 10'.

MINIMUM CAVITY DIMENSIONS

ALL TRIMS EXCEPT EDGEMONT

	standard install	with leveling platform	with fan	
Width*	33¼"	33¼"	33¼"	
Depth X	15½"	16"	18½"	
Height Y	23¼"	23¼"	23¼"	

^{*}minimum fireplace opening at front

WITH EDGEMONT TRIM

no fan	with fan
35¾"	35¾"
16¾"	19¾"
23¾"	23¾"

NOTE:

Edgemont trims, 799 and 784, require a larger and deeper cavity — see manual.



EFFICIENCY

FUEL BTU/hour

IMPROVED BY AutoFire™

model	FUEL	MAX. INPUT	MIN. INPUT	ENERGUIDE RATING*	MAX. OUTPUT W/O FAN*
780M	Natural Gas	28,000	14,000	70.00%	20,933
780M	Propane	28,000	14,000	70.00%	20,933
785Y	Natural Gas	28,000	15,000	70.02%	20,664
785Y	Propane	28,000	13,000	70.05%	19,344

^{*} EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-15 test method

Certified to ANSI Z21.88-2017/ CSA 2.33-2017 Vented Gas Fireplace Heater American National Standard CGA - 2.17-91 Gas Fired Appliances for use at High Altitudes

ABOUT OUR EFFICIENCY RATINGS

While the North American fireplace industry is largely self-regulated, at Valor we use recognized Canadian and US government testing methods to determine our energy efficiencies, and ensure our products perform in your home as rated. To find out more, visit valorfireplaces.com/efficiency

THE G4'S VALORSTAT MAX REMOTE

Select, adjust and program your desired temperature.

Program the built-in timer to turn your fireplace ON before you wake up and DOWN when you go to bed.

Turn your pilot light ON and OFF with your programmable remote control. You'll never need to get on your hands and knees to light the pilot again!



OPTIONAL WALL SWITCH (1265WSK)



Refer to the G4 Insert Series engine manuals for product installation. All product information is accurate at time of printing and is subject to change. For more information visit valorfireplaces.com/g4









△ WARNING

This product can expose you to chemicals including Benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov

Note: Natural gas, in its original state, contains Benzene.

OPTIONS

FUEL BEDS

DIRECT VENT BURNER

Traditional Logs NEW	1000LSK	
Birch NEW	1000BLK	780M steel burner NEW
Driftwood NEW	1000DWK	-
Pebble Beach Driftwood	1101DWK	70EV coramic hurner
Murano Glass	785XDGM	785Y ceramic burner

Available with natural gas or propane.

LINERS

Fluted Black	788FBL V2
Reflective Glass	787RGL
Red Brick	789VRL V2
Ledgestone NEW	786LSL V3

CHOOSE A FRONT:

CHOOSE A BACKING PLATE:

FLOATING 2.5": 3-SIDED				0	PTIONA	L
Vintage Iron	36" w x 25%" h	790FTV		for Floatin	g and Squ	uare fronts
FLOATING 5": 3-SIDED Vintage Iron Bronze	40%" w x 27%" h 40%" w x 27%" h	792FTV 792FTZ		3-SIDED SMALL		
FLOATING 5": 4-SIDED			_ +	794BPB		3-SIDED LARGE 794BPB-1
Vintage Iron	40%" w x 32½" h	798FFV		46" w x 31" h	or	48" w x 32%" h
Bronze	40%" w x 32½" h	798FFZ		not for use with 4-sided front		
SQUARE 5.75": 3-SIDED						
Vintage Iron	43" w x 28%" h	791STV				
Black	43" w x 28%" h	791STB				

EDGEMONT				REQUIRED		
Brushed Nickel	799EDFN			for Edgemont fro	nts	
Bronze	799EDFZ	_	SMALL	MEDIUM		LARGE
Craftsman Champagne Brass NEW	784ECCB		799BPB-1	799BPB-2	۰.	799BPB-3
Craftsman Pewter NEW	784ECPW		39½"w x 27" h	46" w x 31" h	or	48"w x 32%"h
Craftsman Bronze NFW	784FCBR	_				

RISERS

Riser, Black	46¼" w x 2½" h	793RTB	Risers fit specific fronts and backing
Riser, Vintage Iron	46¼" w x 2½" h	793RTV	plates. See manual for details.

